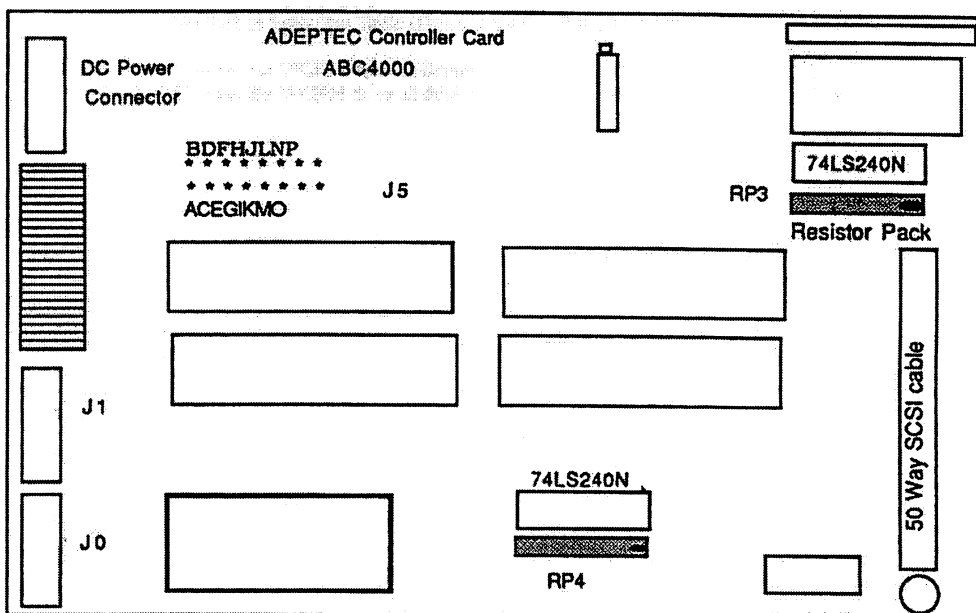


## APPENDIX A

The ADEPTec controller card is used to control the internal hard disk and any external devices from the Series III. This controller board is found on the same board as the SCSI drive.

Below is description of how to remove the internal Series III resistors to allow the external terminator plug to be used. This is only necessary if your CMI Series III did not come with the external terminator plug.



*Diagram of the Adeptec Controller Card*

The controller card is located beside the internal Series III hard disk. To gain access to this card, remove the right hand side of the Series III. The resistor packs marked PR3 and PR4 are used to terminate the SCSI signals.

Once removed, place the Terminator Plug supplied with the WORM drive on the last SCSI device in the chain of SCSI devices. If only one SCSI device is used (e.g the WORM drive) then the terminator plug must still be used at the output terminator. If no SCSI devices are used, then the terminator plug must be placed on the SCSI port of the Series III.

\* \* \* \*